


# Chain Tracks

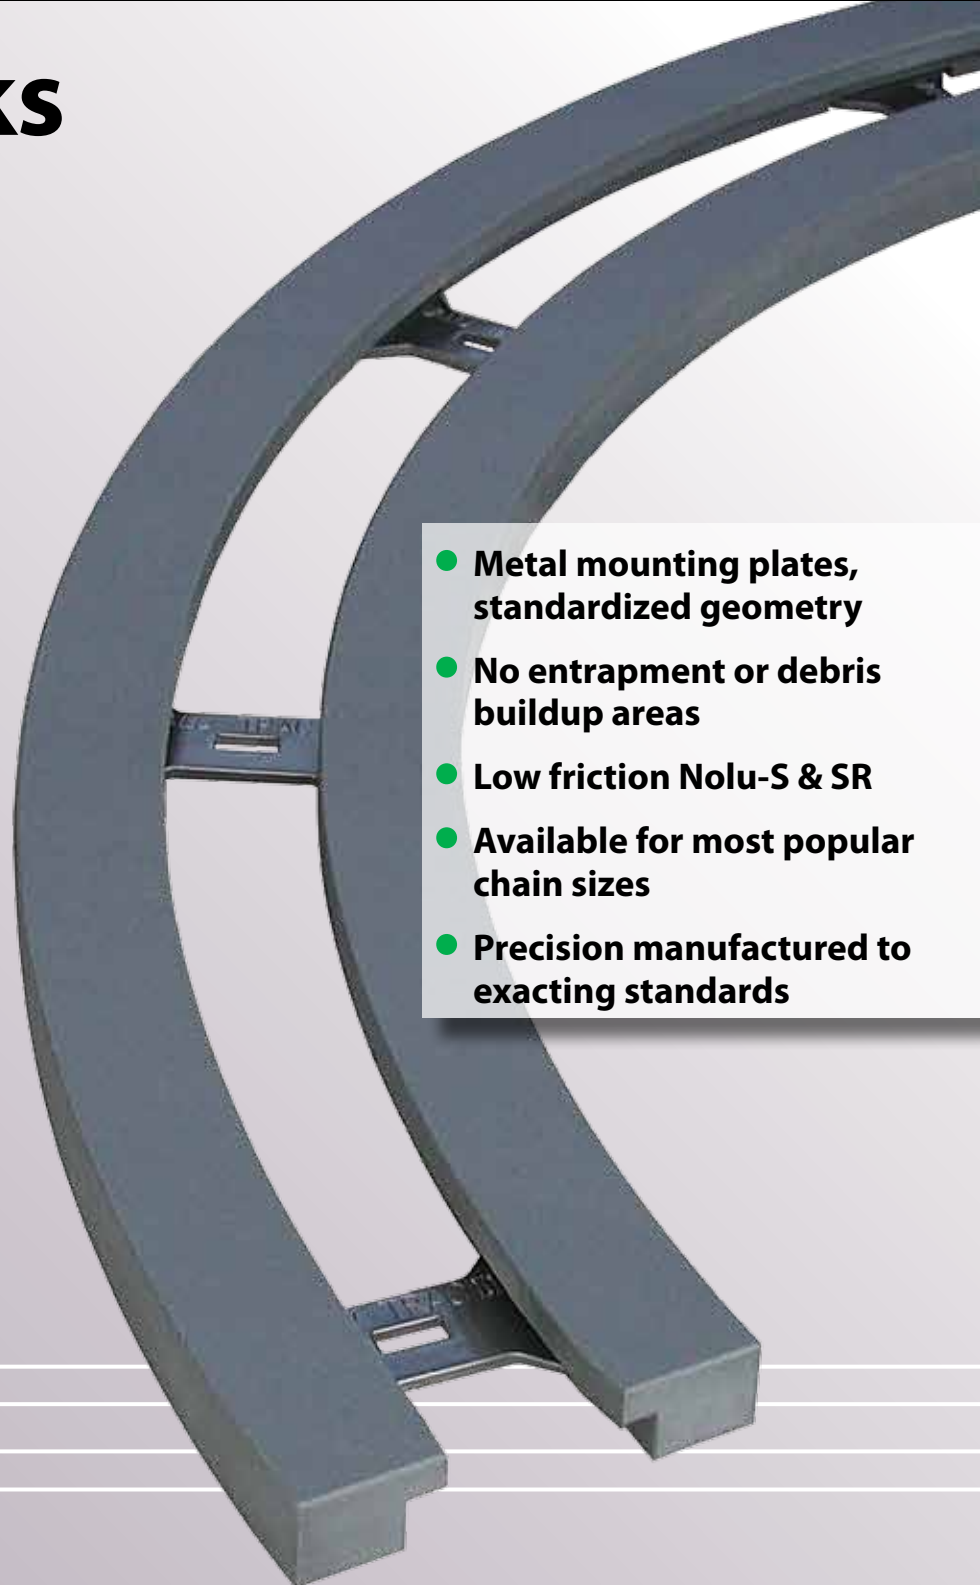

- Metal mounting plates, standardized geometry
- No entrapment or debris buildup areas
- Low friction Nolu-S & SR
- Available for most popular chain sizes
- Precision manufactured to exacting standards

Design: **VALU TRAC II**  
**VALU TRAC III**

Materials: **NOLU-S**  
**NOLU-SR**

# The Sanitary Solution for TAB Conveyor Chains!

AVAILABLE FOR  
IMMEDIATE SHIPMENT



ValuTrac II™ combines the durability and low friction of our engineered plastic wear materials with sturdy stainless steel mounting plates. This unique design allows unwanted material to simply fall away from the track and not interfere with the movement of the chain. ValuTrac II™ straight and corner modules are designed to guide side flexing steel and plastic conveyor chains. All ValuTrac modules are manufactured with state of the art computer controlled machinery, assuring parallel sides and a smooth uniform chain guiding surface. When it is necessary to modify or replace a guideway, ValuTrac's modular design will make the job easier. ValuTrac's quality and consistency assure conveyor chain guiding that is reliable and long lasting.

## Cost Savings




The modular design of ValuTrac™ significantly reduces fabrication time. Fewer parts require fewer fasteners, fewer connections and fewer supports. The result is an overall time and cost savings.

No Entrapment  
or Debris  
Buildup Areas!



ValuTrac II™ for tab chains can be used as carry-ways, or flipped upside down and used as return-ways.





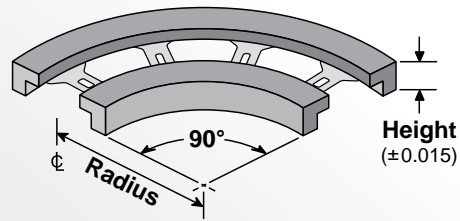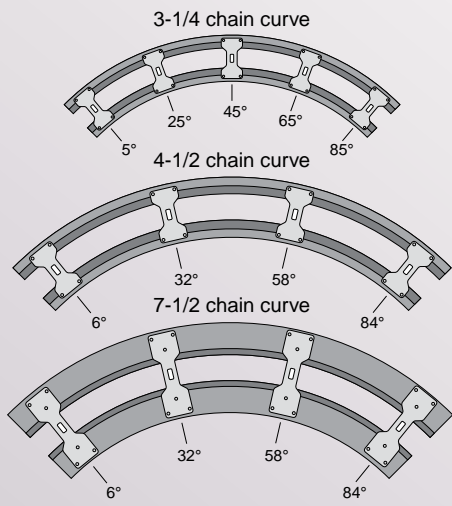

## Curves for Tab Chain

NOLU-BR	NOLU-S	NOLU-SR
Nolu-BR UHMW is our standard track material. It is a proprietary blend of resins and reground UHMW that maximizes wear and friction properties for most applications.	Nolu-S is a patented alloy of UHMW and other dry lubricants that maintains good wear characteristics while significantly reducing the track's coefficient of friction.	Nolu-SR combines the Nolu-S features with a much harder, longer wearing composition which can be used in most high-speed/high-load applications previously requiring Nylatron material.

Chain Number	Track Width	Track Height	Carry or Return	Radius	Nolu-BR Part Number	Nolu-S Part Number	Nolu-SR Part Number
879TAB-K3-1/4 880TAB-K3-1/4 881TAB-K3-1/4	3.75	1		18 24	VT2-980-T-18-0325 VT2-980-T-24-0325	VT2-S-980-T-18-0325 VT2-S-980-T-24-0325	VT2-SR-980-T-18-0325 VT2-SR-980-T-24-0325
879TAB-K4-1/2 880TAB-K4-1/2 881TAB-K4-1/2	5	1		24	VT2-980-T-24-0450	VT2-S-980-T-24-0450	VT2-SR-980-T-24-0450
882TAB-K4-1/2	5	1.188		24	VT2-982-T-24-0450	VT2-S-982-T-24-0450	VT2-SR-982-T-24-0450
881TAB-K7-1/2	8	1		24	VT2-981-T-24-0750	VT2-S-981-T-24-0750	VT2-SR-981-T-24-0750
882TAB-K7-1/2	8	1.188		24	VT2-982-T-24-0750	VT2-S-982-T-24-0750	VT2-SR-982-T-24-0750
1873-K3-1/4 1874-K3-1/4	3.75	1.375		18 24	VT2-973-T-18-0325 VT2-973-T-24-0325	VT2-S-973-T-18-0325 VT2-S-973-T-24-0325	VT2-SR-973-T-18-0325 VT2-SR-973-T-24-0325

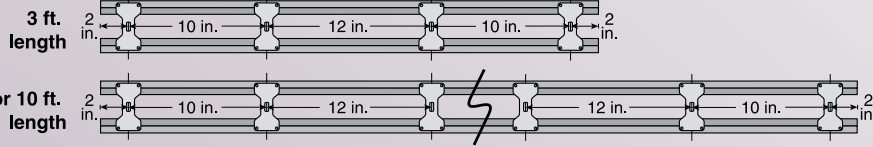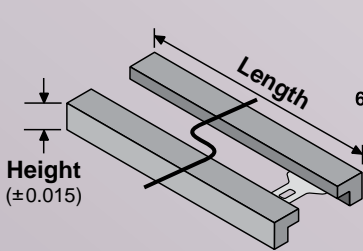


## Straight Sections for Tab Chain

Chain Number	Track Width	Track Height	Carry or Return	Length in Feet	NOLU-BR	NOLU-S
					Part Number	Part Number
879TAB-K3-1/4 880TAB-K3-1/4 881TAB-K3-1/4	3.75	1		3	VT2-980-T-S-0325-3	VT2-S-980-T-S-0325-3
				6	VT2-980-T-S-0325-6	VT2-S-980-T-S-0325-6
				10	VT2-980-T-S-0325-10	VT2-S-980-T-S-0325-10
879TAB-K4-1/2 880TAB-K4-1/2 881TAB-K4-1/2	5	1		3	VT2-980-T-S-0450-3	VT2-S-980-T-S-0450-3
				6	VT2-980-T-S-0450-6	VT2-S-980-T-S-0450-6
				10	VT2-980-T-S-0450-10	VT2-S-980-T-S-0450-10
882TAB-K4-1/2	5	1.188		3	VT2-982-T-S-0450-3	VT2-S-982-T-S-0450-3
				6	VT2-982-T-S-0450-6	VT2-S-982-T-S-0450-6
				10	VT2-982-T-S-0450-10	VT2-S-982-T-S-0450-10
881TAB-K7-1/2	8	1		3	VT2-981-T-S-0750-3	VT2-S-981-T-S-0750-3
				6	VT2-981-T-S-0750-6	VT2-S-981-T-S-0750-6
				10	VT2-981-T-S-0750-10	VT2-S-981-T-S-0750-10
882TAB-K7-1/2	8	1.188		3	VT2-982-T-S-0750-3	VT2-S-982-T-S-0750-3
				6	VT2-982-T-S-0750-6	VT2-S-982-T-S-0750-6
				10	VT2-982-T-S-0750-10	VT2-S-982-T-S-0750-10
1873-K3-1/4 1874-K3-1/4	3.75	1.375		3	VT2-973-T-S-0325-3	VT2-S-973-T-S-0325-3
				6	VT2-973-T-S-0325-6	VT2-S-973-T-S-0325-6
				10	VT2-973-T-S-0325-10	VT2-S-973-T-S-0325-10





## Hybrid Curves for Tab Chain

Nolu-BR and Nolu-SR (inside)




Nolu-S and Nolu-SR (inside)



ValuTrac III™ for tab chains can be used as carry-ways, or flipped upside down and used as return-ways.

Chain Number	Track Width	Track Height	Carry or Return	Radius	Part Number	Part Number
879TAB-K3-1/4 880TAB-K3-1/4 881TAB-K3-1/4	3.75	1		18	VT3-SR-B-980-T-18-0325	VT3-SR-S-980-T-18-0325
24				VT3-SR-B-980-T-24-0325	VT3-SR-S-980-T-24-0325	
879TAB-K4-1/2 880TAB-K4-1/2 881TAB-K4-1/2	5	1		24	VT3-SR-B-980-T-24-0450	VT3-SR-S-980-T-24-0450
882TAB-K4-1/2				5	1.188	
881TAB-K7-1/2	8	1		24	VT3-SR-B-981-T-24-0750	VT3-SR-S-981-T-24-0750
882TAB-K7-1/2	8	1		24	VT3-SR-B-982-T-24-0750	VT3-SR-S-982-T-24-0750
1873-K3-1/4 1874-K3-1/4	3.75	1.375		18	VT3-SR-B-973-T-18-0325	VT3-SR-S-973-T-18-0325
				24	VT3-SR-B-973-T-24-0325	VT3-SR-S-973-T-24-0325



Most wear occurs on the inside portion of tracks. In some situations where Nolu-SR is necessary, ValuTrac III™ is an economical alternative to solid Nolu-SR curves.



### Nolu-S

Nolu-S is a blend of UHMW and other dry lubricants. It maintains UHMW wear characteristics while significantly reducing the coefficient of friction. Its unique self-lubricating properties make it ideal for applications requiring low friction, noise reduction, and higher dry-running speeds.


Nolu-S has superior thermal conductivity compared with UHMW. Nolu-S reduces chain pull through lower friction, thus avoiding overloads associated with curves, and increasing chain life. Nolu-S helps reduce energy consumption and lowers stick-slip/pulsation occurrences. Nolu-S contains FDA approved base materials and additives, and is suitable for running dry at higher speed.

#### Nolu-S features:

- Very low coefficient of friction
- High-impact strength
- Chemical resistant
- FDA & USDA approved ingredients
- Minimal moisture absorption
- Noise suppressant

#### Nolu-S benefits:

- Extends chains life
- Reduces energy consumption
- Minimizes product pulsation
- Low noise



\*For further information relative to specific applications or appropriate material selection, contact our Engineering Department directly.

### Nolu-SR

Nolu-SR combines the Nolu-S features with a much harder, longer wearing composition which is used in most high speed/high load applications. Nolu-SR chain tracks offer the ultimate in UHMW wear resistance combined with low friction properties. Nolu-SR, in specific applications, is used as an alternative to Nylatron.\*

Nolu-SR, like Nolu-S, is a unique compound of UHMW and a solid lubricant which drastically reduces the coefficient of friction, while still maintaining the characteristics of UHMW. Nolu-S has superior thermal conductivity compared with UHMW, and helps reduce noise. Nolu-S reduces chain pull through lower friction, thus avoiding overloads associated with curves, and increasing chain life. Nolu-S helps reduce energy consumption and lowers stick-slip/pulsation occurrences. Nolu-S contains FDA approved base materials and additives, and is suitable for running dry at higher speed.

#### Nolu-SR features:


- Superior wear resistance – greater than standard virgin or repro material
- Very low coefficient of friction
- High-impact strength
- Chemical resistant
- FDA & USDA approved ingredients
- Minimal moisture absorption
- Noise suppressant

#### Nolu-SR benefits:

- High wear resistance
- Extends chain life
- Reduces chain loads and energy consumption
- Minimizes product pulsation
- Low noise

### Nolu-SR versus Nylatron

Nolu-SR reduces chain pull and avoids overload in curves.

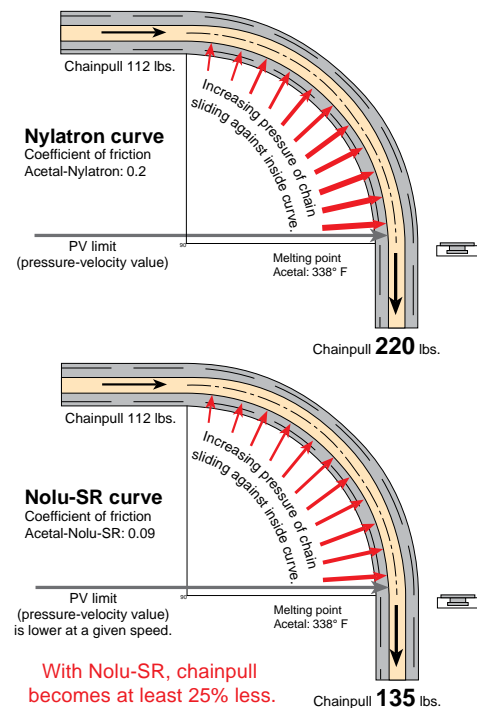

### Customer Service

phone: (866) 765-8744

fax: (866) 447-6587



7120 New Buffington Road Florence, Kentucky 41042  
Chino, California • Sanford, North Carolina • El Salto, Jalisco, Mexico

solusteam@solusii.com

www.solusii.com

© 2007 Solus Industrial Innovations, LLC 10/09